

## Belt bucket elevator

Belt bucket elevators are suitable for vertically conveying powdery, granular and small lumps with less abrasiveness, such as grain, coal, cement, crushed ore, etc., with a lifting height of up to 40m.



# 16 years



**Recommend**

### Structural features


Belt bucket elevator's characteristics are: simple structure, stable operation, digging type loading, centrifugal unloading, material temperature not exceeding 60 °C, high conveying efficiency, and many types of hoppers.

## Technical Parameters

model	TD160				TD250				TD315				TD400			
Hopper form	Q	H	Zd	Sd	Q	H	Zd	Sd	Q	H	Zd	Sd	Q	H	Zd	Sd
delivery volume (m <sup>3</sup> /h)	5.4	9.6	9.6	16	12	22	23	35	17	30	25	40	24	46	41	66
Bucket width(mm)	160				250				315				400			
Bucket capacity(L)	0.5	0.9	1.2	1.9	1.3	2.2	3.0	4.6	2	3.6	3.8	5.8	3.1	5.6	5.9	9.4
Bucket distance(mm)	280		350		360		450		400		500		480		560	
bandwidth(mm)	200				300				400				500			
bucket speed(m/s)	1.4				1.6				1.6				1.8			
Largest piece of material(mm)	25				35				45				55			
model	TD500				TD630			D160		D250		D350		D450		
Hopper form	Q	H	Zd	Sd	H	Zd	Sd	Q	S	Q	S	Q	S	Q	S	
delivery volume (m <sup>3</sup> /h)	38	70	58	92	85	89	142	4.7	8	18	22	25	42	50	72	
Bucket width(mm)	500				630			160		250		350		450		
Bucket capacity(L)	4.8	9	9.3	15	14	14.6	23.5	0.65	1.1	2.6	3.2	7	9.8	14.5	18	
Bucket distance(mm)	500		630		710			300		400		500		640		
bandwidth(mm)	600				700			200		300		400		500		
bucket speed(m/s)	1.8				2			1		1.25		1.25		1.25		
Largest piece of material(mm)	60				70			25		35		45		55		

### Working principle of the belt bucket elevator

The hopper scoops up the material from the storage below, lifts to the top with the conveyor belt or chain, bypasses the top wheel and turns down, and the bucket elevator dumps the material into the receiving trough. The transmission belt of the bucket elevator with transmission is generally a rubber belt, which is installed on the lower or upper driving roller and the upper and lower redirecting roller.

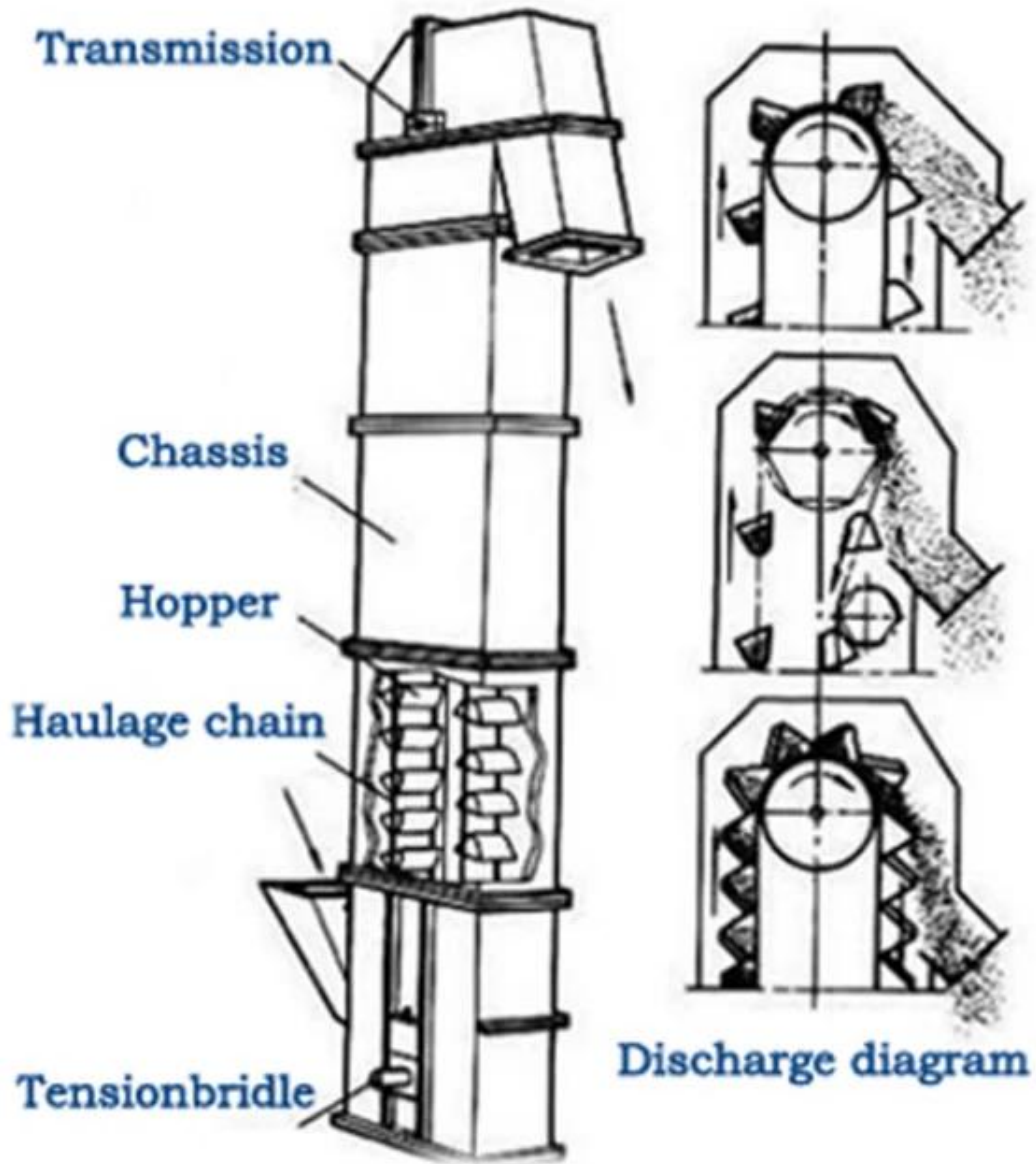

Product Parts



Belt



hopper



wheel



Chain





Observation port

Applicable raw materials

Belt Bucket Elevator is mainly used in grain processing production line (such as rice mill production line, millet production line, wheat flour production line, etc) for the vertical

continuous conveying of powdery materials or granular materials, such as grains (paddy rice, rice, wheat, corn, soybeans, sesame, sorghum, etc).

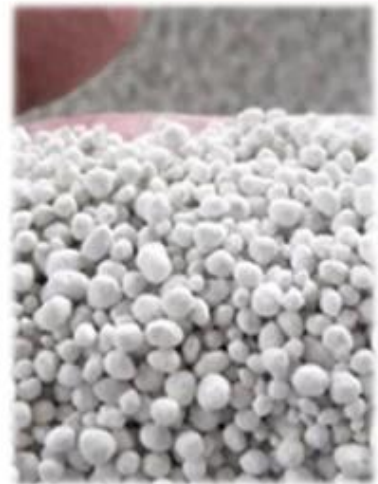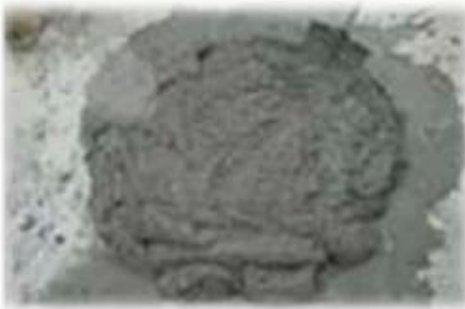

Product advantages of the belt bucket elevator:

1. Easy maintenance, long service life.
2. The chassis plate thickening, good rigidity.
3. The conveying material temperature up to 250 °C. Section
4. In the case with a single channel and dual channel two forms.
5. Hoisting height stable and reliable operation, low noise, easy maintenance.

6.Improve models improve throughput is 30% greater than normal models.

7. Hoist chain using low alloy steel forging, and after carburizing and quenching processes, and have high tensile strength and wear resistance.

#### Application range

Bucket elevators have a wide range of applications. In addition to being suitable for conveying various powdery materials with a bulk density  $P < 2\text{t/m}^3$  and a particle size  $p < 0.5\text{mm}$  in the feed industry, they are also used in coal, cement, stone, lime, clay, ore, etc. , food, construction and other industries have a large number of applications

#### Our service

- A. 24-hour selection guidance to maintain equipment;
- B. Provide production line equipment planning;
- C. Technical personnel can be arranged to go to the site to measure and plan;
- D. Assistance in choosing the right model